


Crosswalk on Compacted Aggregate Base



NOTES:

1. BASE THICKNESS VARIES WITH TRAFFIC, CLIMATE, AND SUBGRADE CONDITIONS.
2. CONCRETE CURBS DO NOT DEFLECT TO THE SAME DEPTH AS PAVERS OR EXISTING ASPHALT. THIS DETAIL IS NOT RECOMMENDED FOR OTHER THAN LOW VOLUME RESIDENTIAL STREETS.
3. THICKENING ASPHALT PAVEMENT ADJACENT TO CONCRETE CURB IS RECOMMENDED.

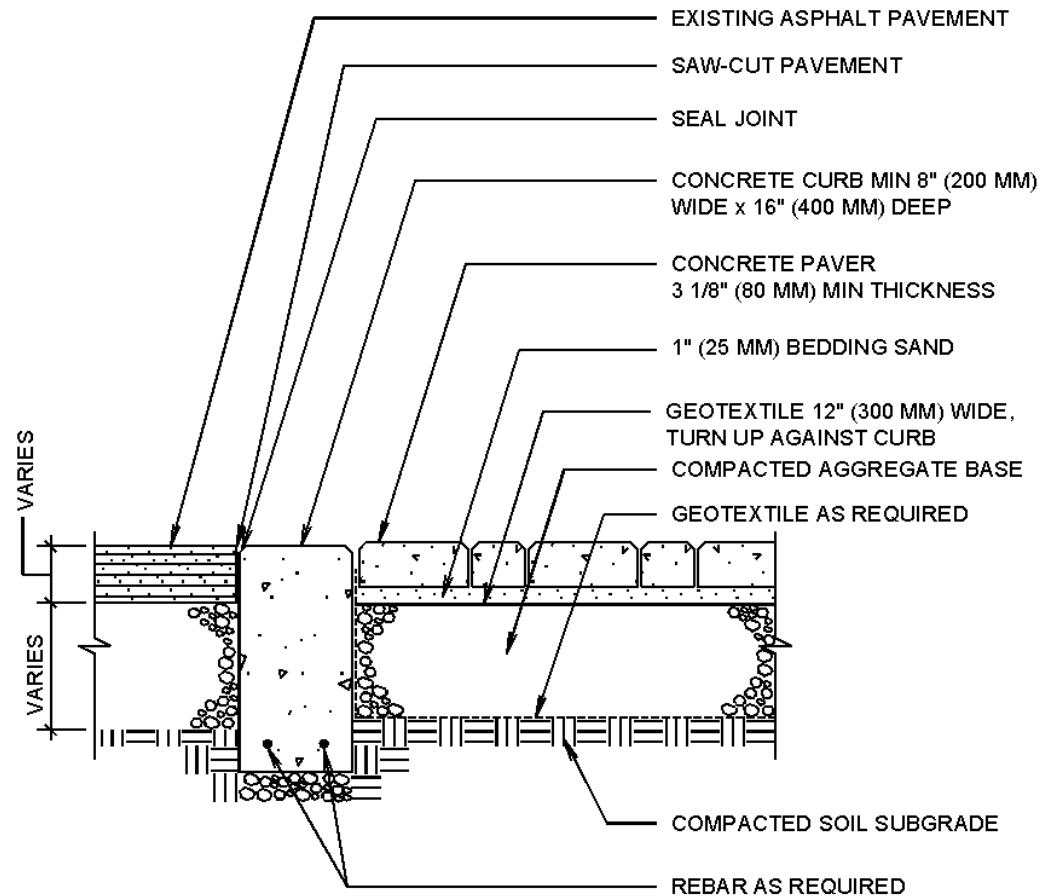

Creating elegant hardscaping environments.

118 International Drive, Suite 101
Morrisville, NC 27560

800-292-7220

www.fredadampaving.com