


Airfield Pavement on Existing Asphalt or Concrete



NOTE:

EXISTING ASPHALT OR CONCRETE PAVEMENT SHALL BE THOROUGHLY INSPECTED FOR AREAS IN NEED OF PATCHING OR REPLACEMENT. CONDUCT ALL REPAIRS AND FILL ALL CRACKS GREATER THAN 1/4 IN. (7 MM) WIDE PRIOR TO PLACING GEOTEXTILE, SAND, AND PAVERS.

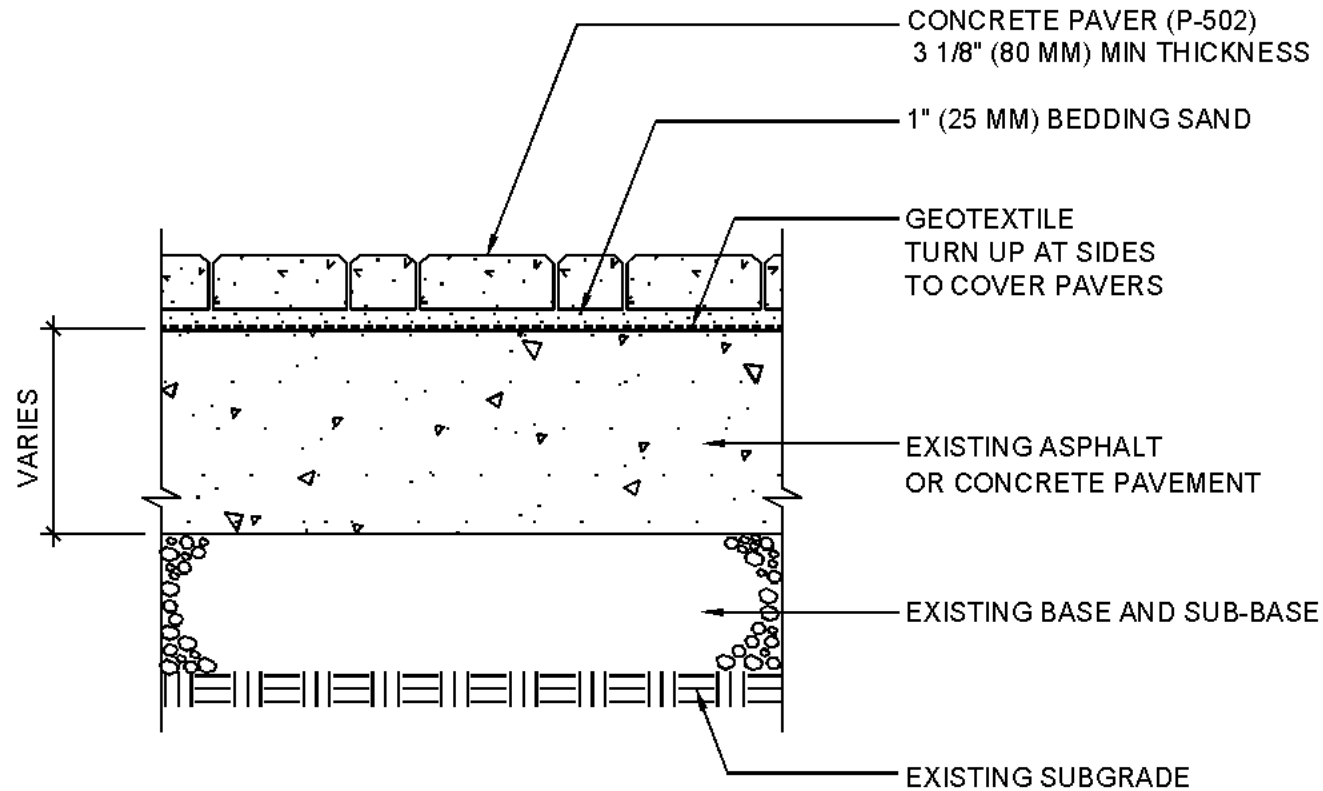

Creating elegant hardscaping environments.

118 International Drive, Suite 101
Morrisville, NC 27560

800-292-7220

www.fredadampaving.com