


# Crosswalk on Concrete Base



## NOTE:

1. BASE THICKNESS AND REINFORCING VARIES WITH TRAFFIC, CLIMATE, AND SUBGRADE CONDITIONS.
2. CONCRETE BASE MINIMUM 2% SLOPE FROM CENTERLINE TO CURB.
3. DO NOT PROVIDE DRAIN HOLES TO SUBGRADE WHEN WATER TABLE IS LESS THAN 2 FT. (0.6 M) FROM TOP OF SOIL SUBGRADE. PROVIDE DRAIN HOLES TO CATCH BASINS.

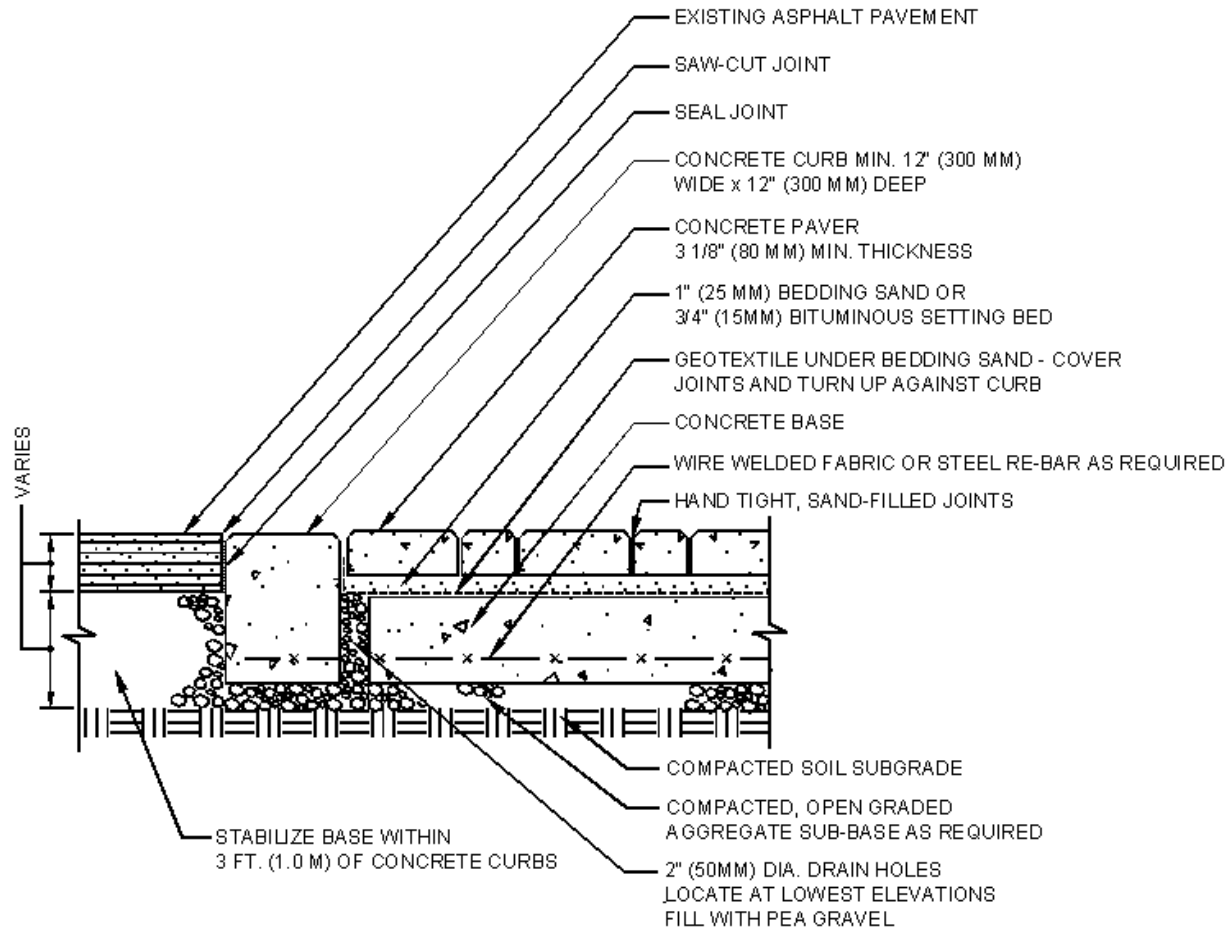

Creating elegant hardscaping environments.

118 International Drive, Suite 101  
Morrisville, NC 27560

800-292-7220

[www.fredadampaving.com](http://www.fredadampaving.com)