


# Permeable No Exfiltration



## NOTES:

1. 2 3/8" (60 MM) THICK PAVERS MAY BE USED IN PEDESTRIAN APPLICATIONS.
2. NO. 2 STONE SUBBASE THICKNESS VARIES WITH DESIGN. CONSULT ICPI PERMEABLE INTERLOCKING CONCRETE PAVEMENT MANUAL.

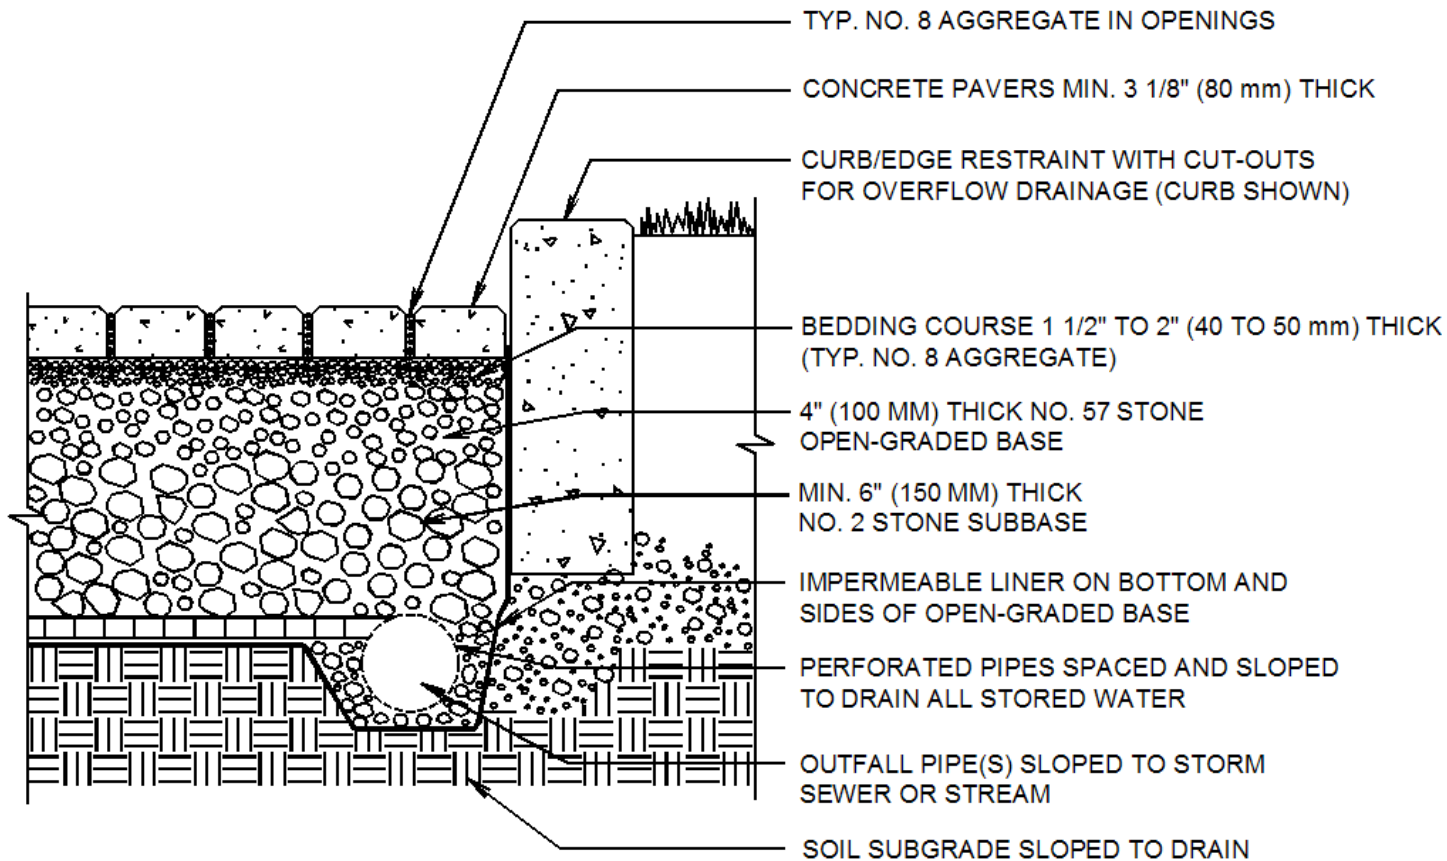

Creating elegant hardscaping environments.

118 International Drive, Suite 101  
Morrisville, NC 27560

800-292-7220

[www.fredadampaving.com](http://www.fredadampaving.com)